
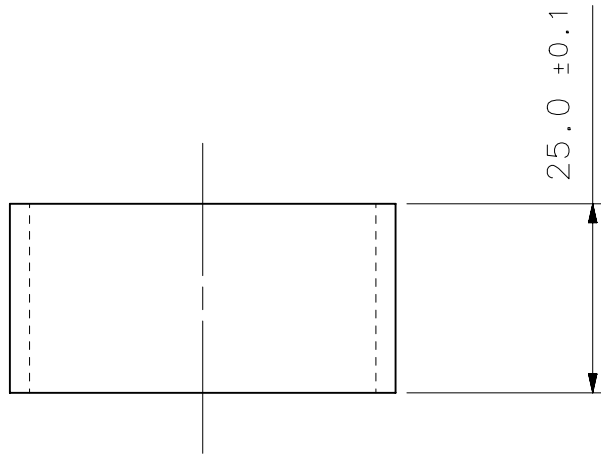



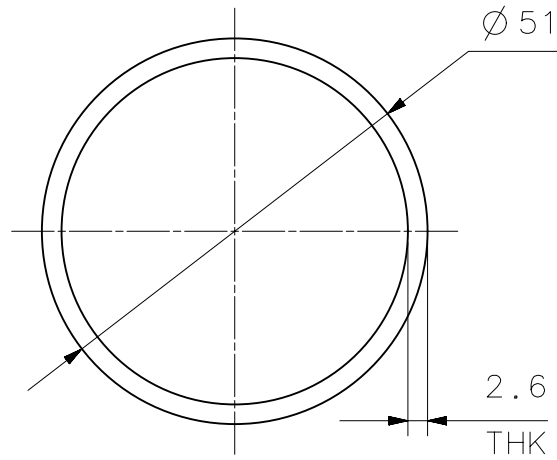

NOTE :-

PART MUST BE FREE FROM FRACTURE, FLASH & SHARP EDGES AND ANY SURFACE IMPERFECTIONS, THAT MAY AFFECT FIT OR FUNCTION OF THE PART.

<SC> :SIGNIFICANT CHARACTERISTICS ▽:CRITICAL CHARACTERISTICS									
BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.						MAHINDRA & MAHINDRA LIMITED TRACTOR DIVISION KANDIVLI (EAST), MUMBAI 400 101, INDIA.			
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989						E.R. / PROC.REQ.NO : 500000002958		PART NO. : 007536262D1	
DIMENSIONS									
LINEAR IN mm.		OVER UPTO	0.5 3	3 6	6 30	30 120	120 400	400 1000	1000 2000
f	FINE (X.XXX)		± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5
m	MEDIUM (X.XX)		± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2
c	COARSE (X.X)		± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3
v	VERY COARSE (X)		-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6
ANGULAR IN deg.		OVER UPTO	- 10	10 50	50 120	120 400	400 -		
f	FINE (X.XXX)		± 1°	± 0° 30'	± 0° 20'	± 0° 10'	± 0° 5'		
m	MEDIUM (X.XX)		± 1° 30'	± 1°	± 0° 30'	± 0° 15'	± 0° 10'		
c	COARSE (X.X)		± 3°	± 2°	± 1°	± 0° 30'	± 0° 20'		
PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.									
COMPUTER GENERATED DRAWING					DO NOT CHANGE MANUALLY				
IF IN DOUBT, ASK			DO NOT SCALE			DRG SIZE : A4		ALL DIMENSIONS ARE IN mm.	
E.R. / PROC.REQ.NO : 500000002958						PART NO. : 007536262D1			
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989						PART NAME : PROTECTIVE RING			
MATERIAL : ERW PIPE IS : 3074						HEAT TREATMENT :			
NAME		SIGN		DATE		FIRST USED TRCR. MODEL 8000 2WD/4WD			
CAD ENGG.						SHEET 1 OF 1			
DESIGNER		PKS		18/03/05		UNIT QTY. : 1			
CHECKER		RNM		18/03/05		WEIGHT : 0.077 kg.			
APPR.BY		DHM		18/03/05		CHECK DRG WITH LATEST CHANGE No			

600000010202	AB		REDRAWN WITH 3D REF.	PG	NVC	RAW	17/07/15
E.R.NO.	LET	LOC	REVISIONS	DSNR	CKR.	APPR.	DATE